


patioSchwank

electricSchwank


Proper Flush Mount Installation

Flush mount your heater in four simple steps


STEP 1 | Frame the pocket that will house the heater and line with a one hour-rated fire containment box.

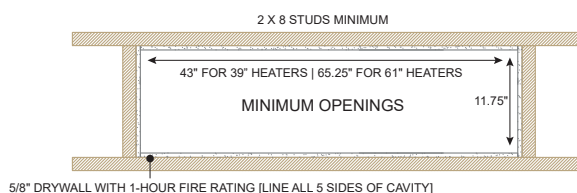


STEP 2 | The junction box must be mounted outside of the lined pocket. You can choose to mount the junction box in a variety of locations, depending upon where you'll be accessing it.

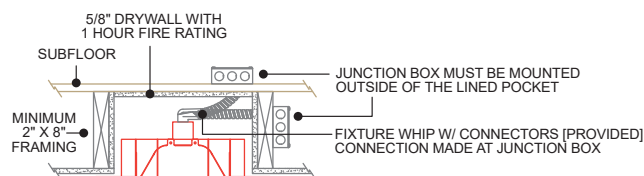

STEP 3 | Install the frame into the finished pocket. You may choose to leave all four inches of the trim exposed, or cover it with a decorative ceiling [1/2\" data-bbox="77 518 470 599"/>

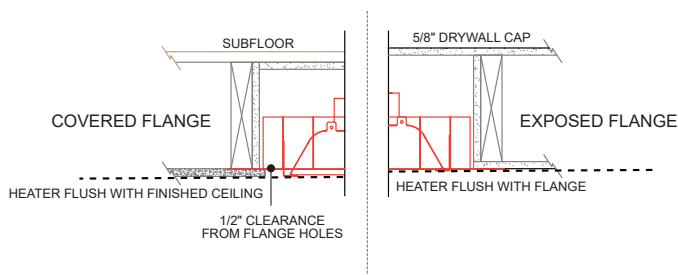

STEP 4 | Install the heater [heater must face horizontal to the floor] and adjust the tabs to set the heater height appropriately.

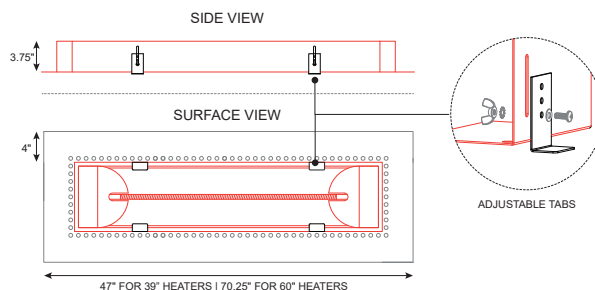

WARNING: Frame and heaters cannot be mounted on a sloped/pitched ceiling. Frame is only to be used on a flat, non-sloped ceiling. Flush mount applications must always be installed with heaters horizontal to the floor