

Décora Series In-Wall Timers

935 Series



93502 - 30 Minute Timer Shown

RATINGS

INPUT: 125-277 VAC, 60 Hz

7A - 125 VAC	Tungsten
20A - 125VAC	Resistive
10A - 250VAC	Resistive
1 Hp - 250 VAC	Motor

ORDERING INFORMATION

Part #	Description
93501	15 Minute
93502	30 Minute
93503	60 Minute
93504	2 Hour
93507	4 Hour
93505	6 Hour
93506	12 Hour
93513	60 Minute with hold
93516	12 Hour with hold

White & Ivory Decorator Dial & Knob Included

WARRANTY

1 Year Limited Warranty

OVERVIEW

The MarkTime® 935 Décora Series In-Wall Timers are interchangeable with any standard single or multi-gang wall switch. These energy saving timers use no electricity to operate and automatically limit the "ON" time of energy consuming loads.

APPLICATIONS

The Décora Series in-Wall Timer switch is an easy upgrade from any single pole wall switch. The 935 Series can be used in a variety of residential and light commercial applications providing convenient timed control of lighting, fans, heaters, motors and other energy consuming loads.


FEATURES & BENEFITS

- Versatile time limits allow for quick, simple operation while providing the most effective energy management.
- Select models have a convenient hold feature to override automatic shutoff.
- Combined N.O. and N.C. switching configurations give the convenience and versatility of either typical operation; turning a load on during time delay or reverse operation of turning the load off during time delay.
- Switching Convenience - SPST switching with the option to be wired for SPDT.
- No neutral required – great for retrofits, saves time and money.
- White & ivory decorator dials & knobs included so you carry 1 SKU VS. 2; saving counter space & inventory cost.
- Supplied decorator dials can be installed with either standard or decorator wall plates.
- Fits single or multi-gang wall box to replace a single-pole wall switch for fast easy installation.

Caution: Not to be used in precision timing applications where inaccurate timing could have dangerous consequences. (i.e. sun lamp, tanning beds etc.) Do not use with fluorescent lamp ballasts.




INSTALLATION

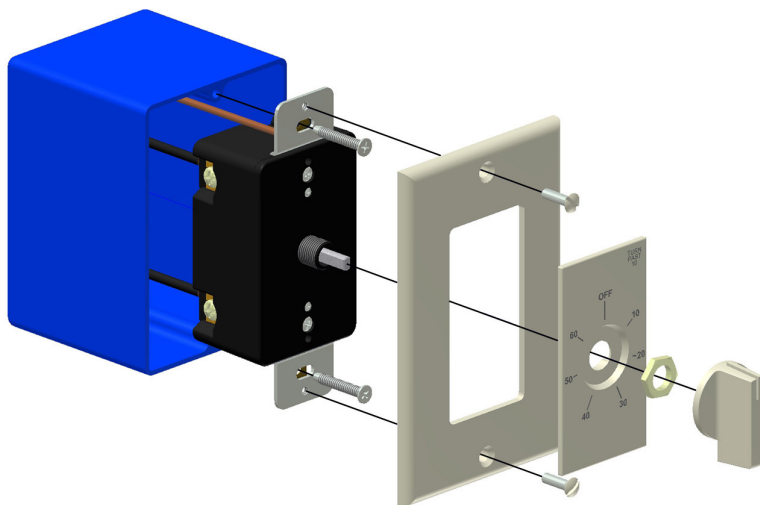

WIRING DIAGRAMS

TYPICAL WIRING

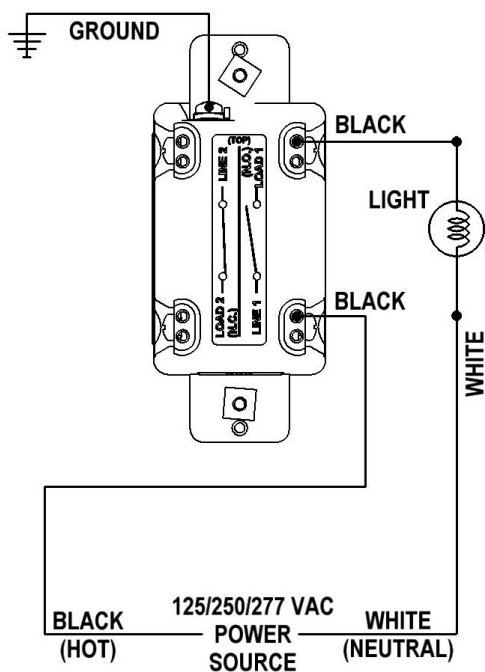

REVERSE OPERATION

