


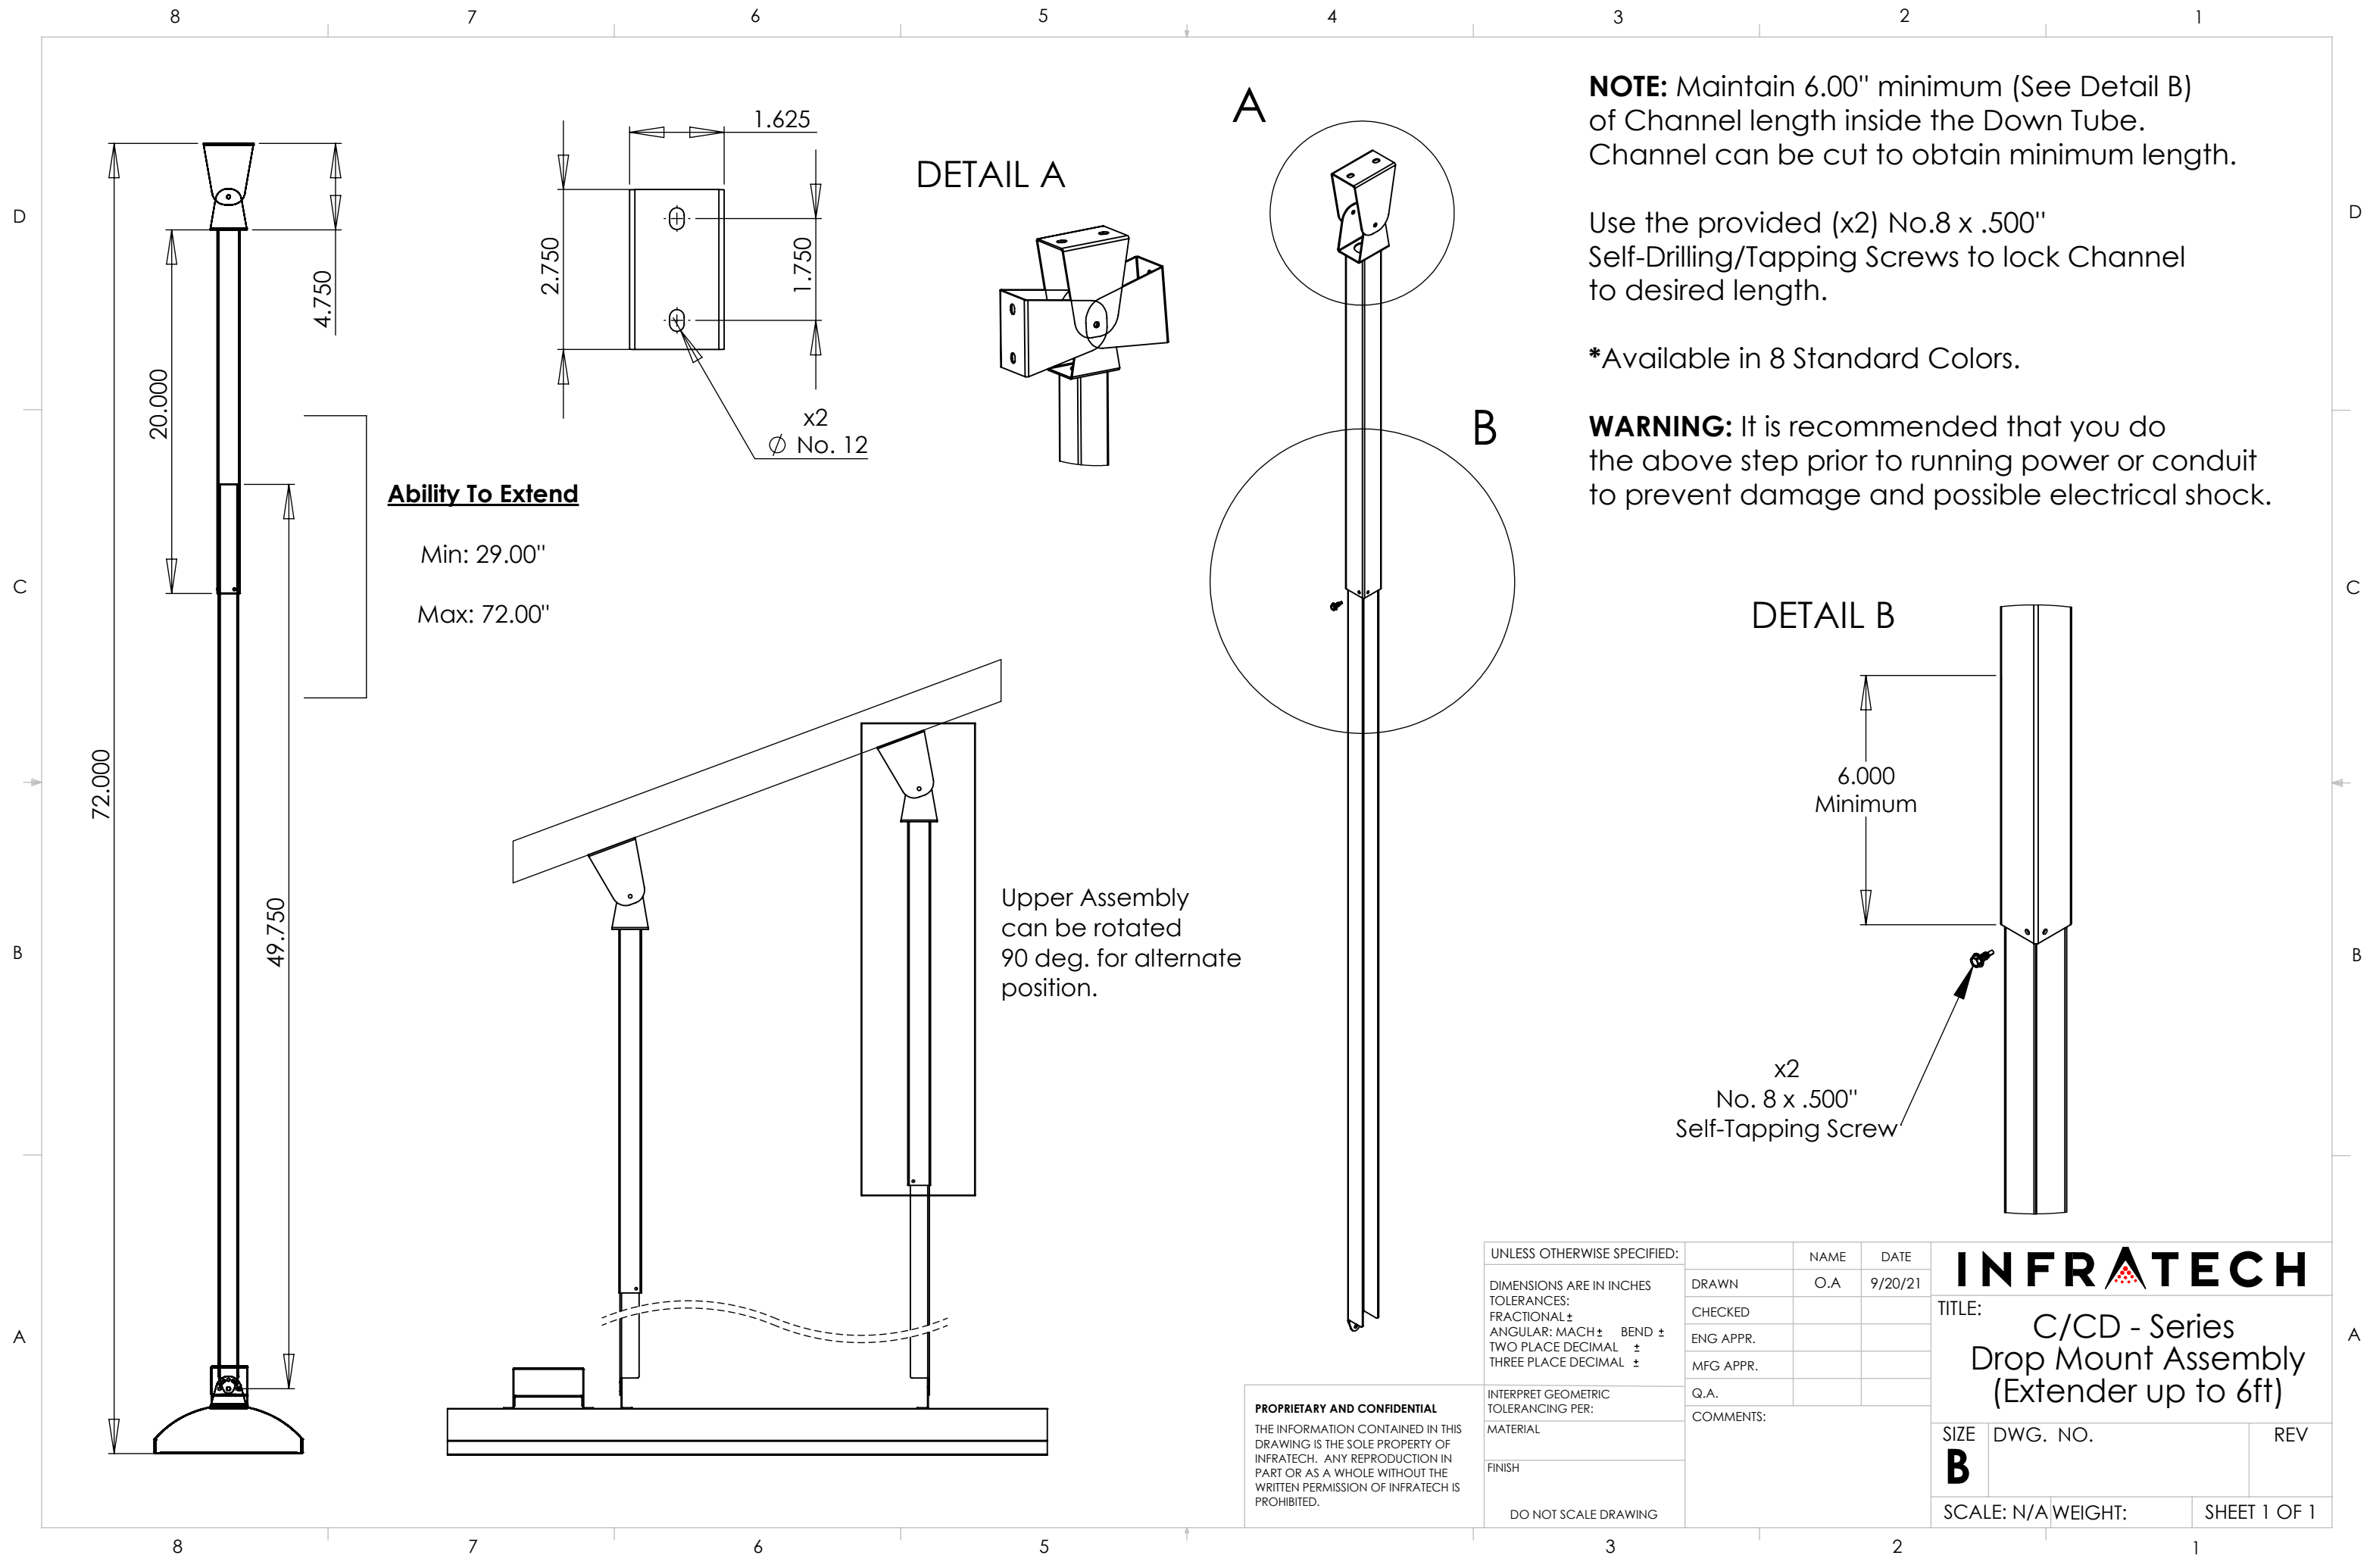

NOTE: Maintain 6.00" minimum (See Detail B) of Channel length inside the Down Tube. Channel can be cut to obtain minimum length.

Use the provided (x2) No.8 x .500" Self-Drilling/Tapping Screws to lock Channel to desired length.

*Available in 8 Standard Colors.

WARNING: It is recommended that you do the above step prior to running power or conduit to prevent damage and possible electrical shock.

Ability To Extend

Min: 29.00"

Max: 72.00"

Upper Assembly can be rotated 90 deg. for alternate position.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	O.A
TOLERANCES:		CHECKED	9/20/21
FRACTIONAL ±		ENG APPR.	
ANGULAR: MACH ±		MFG APPR.	
BEND ±		Q.A.	
TWO PLACE DECIMAL ±		COMMENTS:	
THREE PLACE DECIMAL ±			
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			
INFRATECH			
TITLE: C/CD - Series Drop Mount Assembly (Extender up to 6ft)			
SIZE	DWG. NO.	REV	
B			
SCALE: N/A WEIGHT:			SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFRATECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INFRATECH IS PROHIBITED.